




KIA Roller Industry Co.,Ltd

NTN 4T-25590/25522 tapered roller bearings

Bearing No. 4T-25590/25522

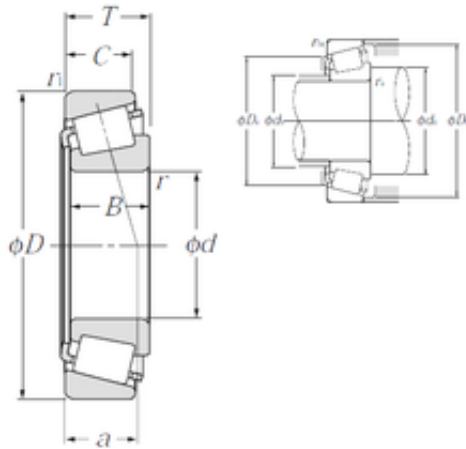

4T-25590/25522 Bearing 2D drawings and 3D CAD models

Size	45.618x83.058x23.876 mm
Bore Diameter	45,618 mm
Outer Diameter	83,058 mm
Width	23,876 mm
d	45,618 mm
D	83,058 mm
T	23,876 mm
B	25,4 mm
C	19,114 mm
ra1 max.	2 mm
a	6,2 mm
Da	73 mm
db	51 mm
ra max.	3,5 mm
da	58 mm
Db	77 mm
Weight	0,545 Kg
Basic dynamic load rating (C)	76 kN
Basic static load rating (C0)	98 kN
(Grease) Lubrication Speed	4 500 r/min
(Oil) Lubrication Speed	6 000 r/min
Calculation factor (e)	0,33
Calculation factor (Y0)	0,99
d1	63 mm
e	0.33
Y2	1.79



KIA Roller Industry Co.,Ltd

Y0	0.99
Mass	0.54 kg
Dynamic load, C	76 kN
Rating life coefficient, A2	1.4
Static load, C0	98 kN
Fatigue limit load, Cu	12 kN
Nlim (oil)	6,000 rpm
Nlim (grease)	4,500 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.08 Hz
Characteristic outer ring frequency, BPF0	7.78 Hz
Characteristic inner ring frequency, BPFI	10.22 Hz
ra max	3.5 mm
r1a max	2 mm
Category	Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.555
Product Group	B04334